

1 plug socket charging station, from 3.7 kW to 22kW, wall or pedestal mounted. AGICITY UNO ev-charger is ideal for equipping a parking space in collective housing, businesses and public access buildings that do not require remote management.

DESCRIPTION

The modularity of the AGICITY UNO allows it to meet the requirements of many specifications such as that of the EV Ready label and those of the Advenir program.

Configuration

- Power supply: from 1x **3.7kW** to 1x **22kW**
- Electrical protections: not integrated
- Electronic board protection: fuse / return of contactor state
- Plug socket: Lockable Type 2 or Type 2S
- Metering: none or simple (in option)
- Identification: RFID reader (in option) ISO 14443A, ISO 14443B, MiFare

ASSOCIATED SERVICES

Energy management

- Load management possible in a "all or nothing" mode by connecting a dry contact outside of the terminal.
- Compatible operation with HP / HC signals transmitted by power suppliers.

Charge access

- Plug & charge
- Local user authentication through RFID (5 badges)
- Offline authorization by badges (5 badges)

CHARACTERISTICS

Construction characteristics

Charging mode	Mode 3
Number of charging points	1
Material	Steel

Dimensional characteristics

Approximate net weight	9.0 kg
------------------------	--------

Mechanical characteristics

IK Rating	10
-----------	----

Usage characteristics

IP Rating	IP55
Operating temperature, range	-30 .. 50 °C



STANDARDS

International EN 61851-1;
 EN 61851-22; EN 62196-2


National BS 7671; NF C 15-100

PRODUCT LIST

Nexans ref.	Name	Power [kVA]	Plug socket	EV RFID	Colour
☎ 69834E	AGICITY® UNO E1 1x22kW T2L Cust000001	22	Type 2 lockable	None	White RAL 9003 + Black RAL 9005
☎ 69838E	AGICITY® UNO E1 1x7kW T2L Cust000001	7	Type 2 lockable	None	White RAL 9003 + Black RAL 9005
☎ 69934E	AGICITY® UNO FR 1x22kW T2SL Cust100001	22	Type 2S Lockable	None	White RAL 9003 + Blue RAL 5021
☎ 69787E	AGICITY® UNO FR 1x22kW T2SL Cust110001	22	Type 2S Lockable	Mifare	White RAL 9003 + Blue RAL 5021
☎ 69837E	AGICITY® UNO FR 1x7 kW T2SL Cust110001	7	Type 2S Lockable	Mifare	White RAL 9003 + Blue RAL 5021
☎ 69833E	AGICITY® UNO FR 1x7kW T2SL Cust100001	7	Type 2S Lockable	None	White RAL 9003 + Blue RAL 5021
☎ 69835E	AGICITY® UNO UK 1x22 kW T2L Cust110001	22	Type 2 lockable	Mifare	White RAL 9003 + Blue RAL 5021
☎ 69839E	AGICITY® UNO UK 1x7 kW T2L Cust110001	7	Type 2 lockable	Mifare	White RAL 9003 + Blue RAL 5021

☎ = Make to order, 📦 = In stock

AGICITY UNO DETAILS

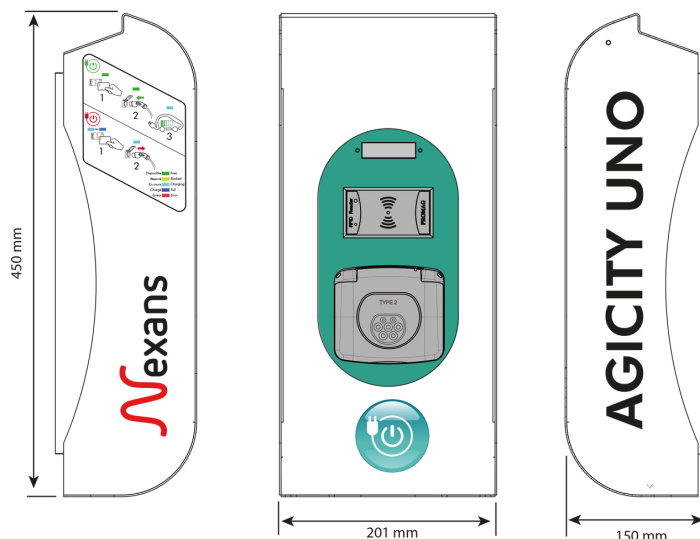

OPTIONS

- Alternative electrical protections (welding detection)
- Customisation (sticker)

RELATED PRODUCTS

- Pedestal : 69822E
- Anchor for pedestal on loose ground: 69942E

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Nexans is indicative only and shall not be binding on Nexans or be treated as constituting a representation on the part of Nexans.

- NEOBUS : cable for indoor installations : 302844 / 302845 / 302846
- NEOCLICK
 - Three phase kit: 69746E
 - Single phase kit : 69745E